


Graphic reference



Dimensions

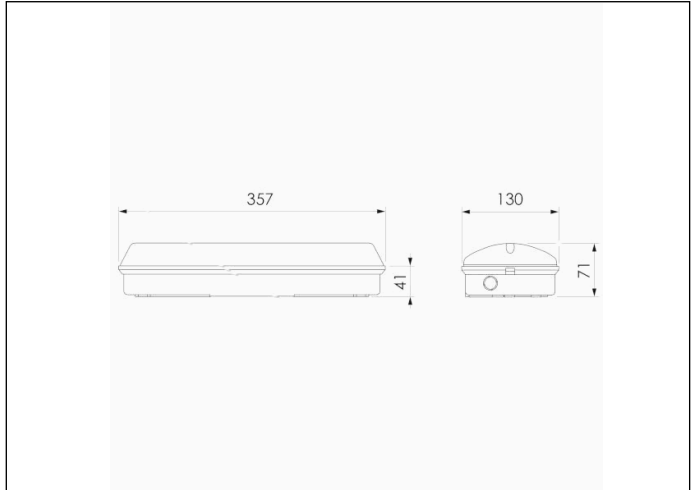

Control System: Standard

Luminaire: Self-Contained

Standards: EN-60598-1,
EN-60598-2-22

Certification: CE

Electrical characteristics

Supply: 230V 50Hz<3.5W

Maintained mode consumption: 3.5 W

Non-maintained mode consumption: 1.4 W

Working temperature: 0-40°C

Emergency lamp: 12 x LED 0.5W

Emergency lumen output: 250 lm

Maintained lumen output: 150 lm

Battery: 3.6V-1.6Ah Ni-Cd

Class: II

Mode: M/NM

Power factor: - %

Signaling Luminaire: -

LED temperature: 4000°K

Duration: 2 h

Remote control: Yes

Charging time: 24 h

Mechanical characteristics

Envelope: Polycarbonate

Diffuser: Matted Polycarbonate

Suitable for flammable surfaces: Yes


ATEX Envelope:

IP/IK: IP65/IK10

Finish: White RAL9003

Weight: 1,00KG

Photometric curve

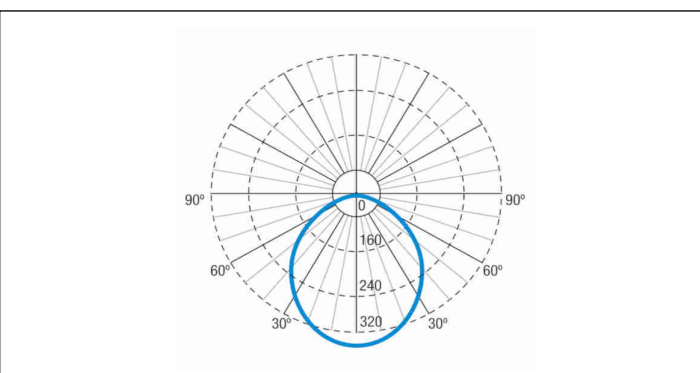

Interdistance

**Installation
height**

2,0 m

2,5 m

3,0 m

3,5 m



8,83 m

9,70 m

10,42 m

11,01 m

8,83 m

9,70 m

10,42 m

11,01 m

Installation characteristics

Maintained luminaires use 3 terminals to enable / disable the maintained mode.
Installation with mounting plate.
Possibility of installation in:
 Ceiling/Wall surface.
Possibility of connection with:
 Surface tube wiring.
It has 3 pre-marked entries for PG-11 cable glands (not included), for mounting with surface pipe.

Operating characteristics

The luminaire has a status LED, which indicates:
 Status of the battery charging circuit.
 On = Battery charge OK.
 Off = Wrong battery charge.
Remote control input that allows:
 Put on standby without power supply.
 Restart in emergency status without power supply.
 Emergency status test with power supply

General Envelope data

Accessories

ADBA008



ACC. DIF. PANEL ARIAN WHITE
WITHOUT SERIG.

APA818



ACC. PICTO. ARIAN PERSON +UP
ARROW

AGA230



ACC. PROTEC. GRILLE ARIAN